

LEWIS
HIJSMATERIAAL G100

LEWIS
LIFTING GEAR G100



Lewis hijsketting / G100 / blauw gelakt
Lewis lifting chain / G100 / blue painted

| EN 818-2
| EN 818-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	DK	B	b	l	WLL	kg/100m
Part no.	mm	mm	mm	mm	kg	kg/100m
52101006	6	22,2	7,8	18	1.400	80
52101008	8	29,6	10,4	24	2.500	151
52101010	10	37,0	13,0	30	4.000	240
52101013	13	48,1	16,9	39	6.700	400
52101016	16	59,2	20,8	48	10.000	600



Lewis verbindingschalm / G100
Lewis connecting link / G100


| EN 1677-1
| EN 1677-1



DK = diameter ketting
DK = diameter chain


WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	D	PxL	H	h	l	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52301006	L-VSC-6	6	7	5,1 x 39,6	8,5	44,5	15	14	1.400	0,08
52301008	L-VSC-8	8	10	6,2 x 53,5	10,5	63	22,5	18,5	2.500	0,18
52301010	L-VSC-10	10	12,6	8,0 x 66,8	12,6	71	25,2	23	4.000	0,34
52301013	L-VSC-13	13	16,5	10,2 x 80	16,5	92,5	29,8	28	6.700	0,68
52301016	L-VSC-16	16	20	12,5 x 100	20	106,5	39,8	33,5	10.000	1,22



Lewis topschalm / 1/2-sprong / G100
Lewis masterlink / 1/2 legs / G100

| EN 1677-4
| EN 1677-4

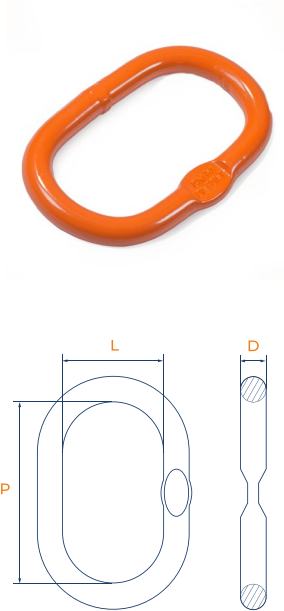

DK-1 = diameter ketting bij kettingleng
DK-1 = diameter chain 1-leg


DK-2 = diameter ketting bij 2-sprong
DK-2 = diameter chain 2-legs

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK-1	DK-2	D	L	P	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
52341007	L-76-10	6/7	6	13	60	110	2.300	0,34
52341008	L-87-10	8	7	16	60	110	3.500	0,53
52341010	L-108-10	10	8	18	75	135	5.000	0,86
52341013	L-1310-10	13	10	22	90	160	7.600	1,6
52341016	L-1613-10	16	13	27	100	180	10.000	2,46
52341019	L-1916-10	19	16	33	110	200	14.000	4,14

Lewis topschalm / 3/4-sprong / G100
Lewis masterlink / 3/4 legs / G100

| EN 1677-4
| EN 1677-4

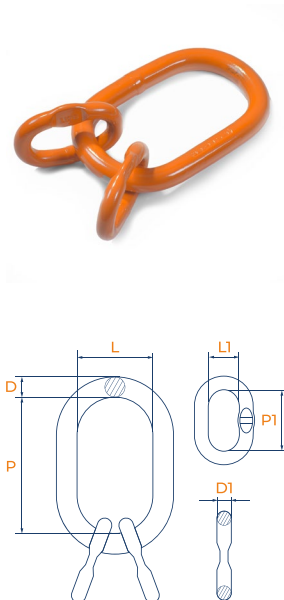

DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)

Artikelnr.	Type	DK	D	D1	L	L1	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52342006	L-6-10	6	18	14	75	25	135	54	3.000	1,26
52342008	L-8-10	8	22	16	90	34	160	70	5.300	2,19
52342010	L-10-10	10	27	18	100	40	180	85	8.400	3,60
52342013	L-13-10	13	33	22	110	50	200	115	14.000	6,35
52342016	L-16-10	16	36	28	140	65	260	140	21.200	9,98


Lewis topschalm / inkorthaak / leng / G100
Lewis masterlink / shortening hook / 1 leg / G100

| EN 1677-4
| EN 1677-4



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	L	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
5234821006	L-TIC-1-6	6	13	60	110	198	1.400	0,64
5234821008	L-TIC-1-8	8	14	70	120	236	2.500	1,31
5234821010	L-TIC-1-10	10	17	80	140	285	4.000	2,05
5234821013	L-TIC-1-13	13	22	95	160	338	6.700	3,84
5234821016	L-TIC-1-16	16	25	110	190	406	10.000	6,75


Lewis topschalm / inkorthaak / 2-sprong / G100
Lewis masterlink / shortening hook / 2 legs / G100

| EN 1677-4
| EN 1677-4



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	D	L	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
5234822006	L-TIC-2-6	6	14	70	120	208	2.000	1,04
5234822008	L-TIC-2-8	8	17	80	140	256	3.550	2,30
5234822010	L-TIC-2-10	10	22	95	160	305	5.600	4,08
5234822013	L-TIC-2-13	13	25	110	190	368	9.500	6,97
5234822016	L-TIC-2-16	16	32	130	230	446	14.000	13,47

Lewis topschalm / inkorthaak / 3/4-sprong / G100 | EN 1677-4
Lewis masterlink / shortening hook / 3/4 legs / G100 | EN 1677-4



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)




Artikelnr.	Type	DK	D	L	P	P1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	kg	kg/piece
5234823006	L-TIC-4-6	6	18	75	135	277	3.000	2,32
5234823008	L-TIC-4-8	8	22	90	160	346	5.300	4,95
5234823010	L-TIC-4-10	10	27	100	180	410	8.000	8,80
5234823013	L-TIC-4-13	13	33	110	200	493	14.000	15,80
5234823016	L-TIC-4-16	16	36	140	260	616	21.200	28,60

Lewis ooghaak / gesmede veiligheidsklep / G100 | EN 1677-2
Lewis eye sling hook / forged safety latch / G100 | EN 1677-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	D1	B	H	h	O	O1	bo	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52402006	L-OHC-6	6	10	16,5	68	21	80	25	18,5	20,5	1.400	0,32
52402008	L-OHC-8	8	11	17	87	27	99	28	25	25	2.500	0,6
52402010	L-OHC-10	10	16	24	105	33	106	35	29,5	32	4.000	1,2
52402013	L-OHC-13	13	19	33	138	43,5	156	43	38	43	6.700	2,2
52402016	L-OHC-16	16	24	40	158	50	185	51	46	51	10.000	3,5


Lewis gaffelhaak / gesmede veiligheidssklep / G100
Lewis clevis sling hook / forged safety latch / G100

| EN 1677-2
| EN 1677-2



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	PxL	B	bg	H	h	O	O1	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52401006	L-GHC-6	6	16,5	7,6 x 30	68,5	7,5	21	73	25	17	1.400	0,33
52401008	L-GHC-8	8	17	9,8 x 34	88	9,5	27,5	88,5	30,5	23	2.500	0,6
52401010	L-GHC-10	10	24	13 x 46	102	12,5	32	105	37,8	29	4.000	1,3
52401013	L-GHC-13	13	34	15,8 x 57	134	15	42	132	48,6	38	6.700	2,3
52401016	L-GHC-16	16	38	19,5 x 68	160,5	18,5	50	161	54	46	10.000	3,6


Lewis self-locking haken / gaffel / G100
Lewis clevis self-locking hook / G100

| EN 1677-3
| EN 1677-3



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	PxL	B	bg	H	h	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52601006	L-SGC-6	6	15	7,6x30	73	8	19,5	96	31,5	1.400	0,5
52601008	L-SGC-8	8	20	9,8x34	90	9,5	25,5	121	40	2.500	0,9
52601010	L-SGC-10	10	26	13x44	108	12	29,5	144	46	4.000	1,4
52601013	L-SGC-13	13	32,5	15,8x57	137	15	39,5	182	66	6.700	2,9
52601016	L-SGC-16	16	38	19,5x68	168	18,5	50	220	75	10.000	5,5


Lewis inkortklaus / gaffel / beveiliging / G100
Lewis clevis shortening clutch / safety pawl / G100

| EN 1677-1
| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	B	bg	C	H	L	O	P	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52503406	L-KVC-6	6	38	7,5	7,5	73	27	7,5	7,5	1.400	0,25
52503408	L-KVC-8	8	50	9,5	9,2	82	33	9,5	9	2.500	0,41
52503410	L-KVC-10	10	69	11,7	12	115	43,5	11,7	13	4.000	0,80
52503413	L-KVC-13	13	79	15	15,5	149	55	15	16	6.700	1,67
52503416	L-KVC-16	16	98	19	18,5	184	70	19	19,5	10.000	4,20


Lewis inkorthaak / gaffel / G100
Lewis clevis grab hook / G100

| EN 1677-1
| EN 1677-1



DK = diameter ketting
DK = diameter chain

WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	DK	D	PxL	B	bg	H	h	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52501006	L-IGC-6	6	25,5	7,6x30	46,5	7,5	18	44,5	8	1.400	0,22
52501008	L-IGC-8	8	38,5	9,8x34	54	9,5	22	53	11	2.500	0,34
52501010	L-IGC-10	10	42	13x44	72	12,5	31	73	13,5	4.000	0,82
52501013	L-IGC-13	13	53,5	15,8x57	96	15	45,5	92	15	6.700	1,75
52501016	L-IGC-16	16	74	19,5x68	115	18,5	48,4	103	19	10.000	2,88


Lewis hijsbandhaak / pin / veiligheidsklep / G100
Lewis webbing sling hook / safety latch / G100

| EN 1677-2

| EN 1677-2



WLL = veilige belasting (4:1)
WLL = working load limit (4:1)



Artikelnr.	Type	A	D	B	F	H	h	M	N	O	WLL	kg/stuk
Part no.		mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	kg/piece
52661001	L-HHC-1	57	17	73	35	117	84	18	28	24	1.000	0,45
52661002	L-HHC-2	72	18	86	40	143	102	24	34	28	2.000	0,90
52661003	L-HHC-3	87	24	108	47	168,5	120	29	38	30	3.000	1,48
52661005	L-HHC-5	131	28	131	73	224	155	35	45	43	5.000	3,40

Lewis palset voor self-locking haak / G80/100
Lewis locking device for self-locking hook / G80/100

| Inhoud set: pal, veer en stift

| Set contains: locking devise, spring and pin



DK = diameter ketting
DK = diameter chain



Artikelnr.	Type	Voor type	DK	kg/stuk
Part no.		For type	mm	kg/piece
50953006	L-PS-6	L-SG-6 / L-SGC-6	6	0,03
50953008	L-PS-7/8	L-SG-7/8 / L-SGC-7/8	7/8	0,04
50953010	L-PS-10	L-SG-10 / L-SGC-10	10	0,06
50953013	L-PS-13	L-SG-13 / L-SGC-13	13	0,10
50953016	L-PS-16	L-SG-16 / L-SGC-16	16	0,14

Lewis reserveset voor verbindingsschalm / G100
Lewis spare set for connecting link / G100

| EN 1677-1 / Inhoud set: pin en bus
| EN 1677-1 / Set contains: pin and bush

DK = diameter ketting
DK = diameter chain



Artikelnr.	Type	Voor type	DK	kg/stuk
Part no.		For type	mm	kg/piece
52952006	L-PBC-6	L-VSC-6	6	0,03
52952008	L-PBC-8	L-VSC-8	8	0,035
52952010	L-PBC-10	L-VSC-10	10	0,06
52952013	L-PBC-13	L-VSC-13	13	0,10
52952016	L-PBC-16	L-VSC-16	16	0,135

Lewis gesmede klepset voor gaffel/ooghaak / G100
Lewis forged latch set for sling hook / G100

| EN 1677-1
| EN 1677-1

DK = diameter ketting
DK = diameter chain



Artikelnr.	Type	Voor type	DK	kg/stuk
Part no.		For type	mm	kg/piece
52951006	L-KSC-6	L-GHC-6 & L-OHC-6	6	0,03
52951008	L-KSC-8	L-GHC-8 & L-OHC-8	8	0,035
52951010	L-KSC-10	L-GHC-10 & L-OHC-10	10	0,06
52951013	L-KSC-13	L-GHC-13 & L-OHC-13	13	0,10
52951016	L-KSC-16	L-GHC-16 & L-OHC-16	16	0,135

Identificatieplaatje / G100
Identification tag / G100

Artikelnr.	Type	Voor type	kg/stuk
Part no.		For type	kg/piece
52955210	zonder ring / without ring	leng / 1 leg	0,12
52955220	zonder ring / without ring	2-3-4 sprong / 2-3-4 legs	0,12
52955230	met ring / with ring	leng / 1 leg	0,15
52955240	met ring / with ring	2-3-4 sprong / 2-3-4 legs	0,15